
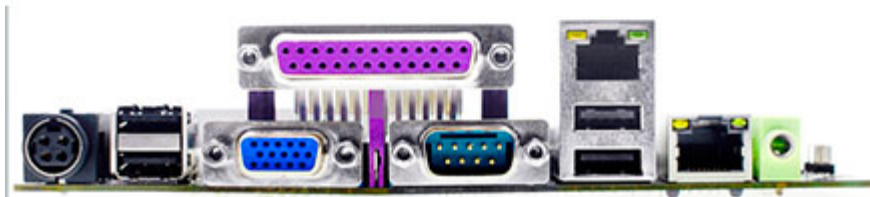


999.00 EUR
incl. 19% VAT, plus [shipping](#)

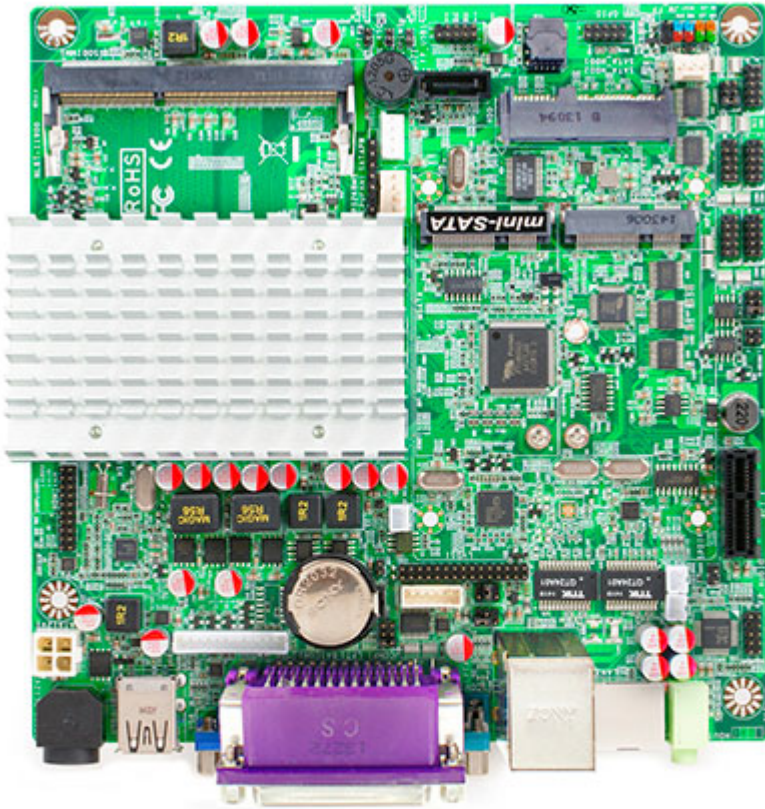

- Intel® Celeron™ J1900 (2.0 GHz) quad-core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 2*PCI Express Gigabit LAN
- Support Power Onboard(12V)
- Onboard 1*MiniPCI-E connector
- Onboard 1 *M- SATA connector
- 2 Phase CPU Power Support
- Support Slim Fan design
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

| | |
|------------------------|--|
| CPU-Chipset | <ul style="list-style-type: none"> • INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor • 2 Phase CPU Power Support |
| I.O Chipset | <ul style="list-style-type: none"> • Fintek F71869 |
| Memory | <ul style="list-style-type: none"> • 1*SO-DIMM slot • Support DDR3L 1333 • Max. capacity of system memory up to 8GB |
| Expansion Slots | <ul style="list-style-type: none"> • 1 * MiniPCI-E connector • 1* PCIe1 slot |

| | |
|-------------------------|--|
| Storage | <ul style="list-style-type: none"> • 1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin) • 1 * M-SATA Connector |
| Audio | <ul style="list-style-type: none"> • ALC887 Audio CODEC • HD Audio CODEC |
| Ethernet LAN | <ul style="list-style-type: none"> • Realtek® RTL8111G Chip • 2*PCI Express Gigabit LAN |
| LVDS | <ul style="list-style-type: none"> • Onboard 24-bit Dual channel |
| USB | <ul style="list-style-type: none"> • 6* USB 2.0/1.1(4 distribute in back panel, 2 distribute in mid-board) |
| Special Features | <ul style="list-style-type: none"> • Support CPU Smart Fan • Support Watch dog Technology • Support GPIO Technology • Support VGA header • Support HDIM header • Support Power On board • Support Amplifier function(3W) • Support Slim Fan design • Support Slim hard drive design • Support 1*RS422/RS485/RS232 COM port • Thunder Protection Function • All Solid Capacitor design • All Power Pack MOSFET design |
| Back Panel I / O | <ul style="list-style-type: none"> • 4* USB 2.0/1.1 ports • 2* RJ-45 port • 1* Print Port • 1* Line-out connector • 1 * VGA port • 1 * COM port (1*RS422/RS485/RS232 COM port) • 1* 12V DC in |
| Internal I / O | <ul style="list-style-type: none"> • 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports • 2*CPU / Chassis Fan connectors • 5*COM headers • 1*PS2/KB header • 1 *4-pin ATX 12V Power connector • 1 *4-pin SATA Power connector • 1 *15-pin VGA header • 1 *20-pin HDMI header • 1 *24-bit Dual Channel LVDS header • 1 *GPIO header • 1 *Mini PCI-e connector • 1 * M-SATA Connector • 1* SATA+Power Connector(7+15Pin)(Option) • 1 * Audio header • 1 * Front panel header • 1* HDMI_SPDIFheader |
| BIOS | <ul style="list-style-type: none"> • AMI 32MB DIP Flash ROM |
| Form Factor | <ul style="list-style-type: none"> • Thin mini ITX Form Factor(170mm X 170mm) |